




**Material:** Polypropylene  
**Temperature:** -60°C/+160°C  
**Resistant to:** It is use to portect people, environment and machinry against any possible hydraulic hose oil leakage or spill.  
**unit per box** 100m  
**Flammability** VW-1  
**Melting point** +260°C  
**Standard thickness** 1.5mm

Part n°	Ø outer	Ø in	L
GT35	21	18	35
GT40	23	20	40
GT45	26	23	45
GT50	31	28	50
GT55	33	30	55
GT65	39	36	65
GT80	46	43	80
GT120	71	68	120
GT150	88	85	150

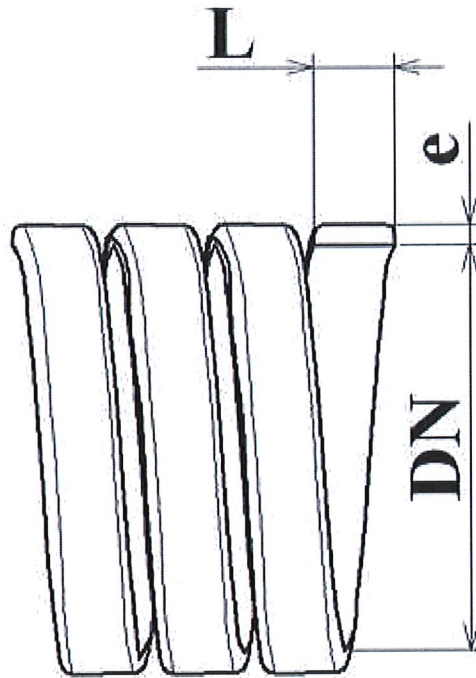

Very resistant to shocks and frictions

Temperature: -20°C to +80°C

Material: PVC

Part n°	DN	Thickness (mm)	LENGTH (M)	PITCH
AMUELLE P12	12	1	50	8
AMUELLE P13	13	1	50	16
AMUELLE P15	15	1	50	16
AMUELLE P16	16	1	50	16
AMUELLE P17	17	1	50	16
AMUELLE P18	18	1	50	16
AMUELLE P20	20	1	50	16
AMUELLE P21	21	1	50	16
AMUELLE P22	22	1	50	16
AMUELLE P25	25	1	50	16
AMUELLE P28	28	1	50	16
AMUELLE P30	30	1	50	16
AMUELLE P33	33	2	20	16
AMUELLE P35	35	2	20	16
AMUELLE P38	38	2	20	16
AMUELLE P40	40	2	20	16
AMUELLE P45	45	2	20	16
AMUELLE P48	48	2	20	16
AMUELLE P50	50	2	20	16
AMUELLE P55	55	2	20	16
AMUELLE P60	60	2	20	16

Part n°	DN	Thickness (mm)	LENGTH (M)	PITCH
<b>AMUELLE P70</b>	70	2	20	16
<b>AMUELLE P80</b>	80	2	15	16